

---

Selcom Industries Inc.  
**TS-2005**  
**SPECIFICATIONS**

---

#### **BASIC OPERATING MODES**

- Selective Ringing Decode mode
  - Indent-a-Call
  - Smart Ring
  - Ring Mate, etc.
- Auto Answer mode including
  - extension off-hook disconnect
  - CPC disconnect
- Selective & Auto Answer mode (combination of above modes)
- CO ring thru before auto answer - allows Call Display information to pass through
- Toll Restrict mode

#### **REMOTE / LOCAL PROGRAMMABLE PARAMETERS (partial list)**

- Ringing Patterns
- 2-6 digit Access Security Code
- 2-6 digit Port Access Code
- Auto Transfer after:
  - 'n' Rings to Device Port 1
  - Silence detection on Device 1
  - On-hook detection on Device 1
  - Fax CNG Tone detection
  - Other than CNG tone detection

#### **PORT ACCESS METHODS**

- Programmable 2 - 6 Digit Tone Dial String
  - Decode after fixed number of digits
  - Decode after variable length digit string
- Rotary Dial Pulse Code
- Hook Switch Flash Code

#### **TRANSFER TO MODEM**


- Reverse Carrier Detect
- Modified Dial String using various Hayes commands or blind dialing (note that for custom orders other methods are available)

#### **MODEM SECURITY CODE**

- User-programmable 2 To 6 Digits standard, longer codes available

#### **PROGRAM ACCESS CODE**

- 2 to 6 digits; cadence & sequence required makes it extremely unlikely if not impossible for unauthorized entry

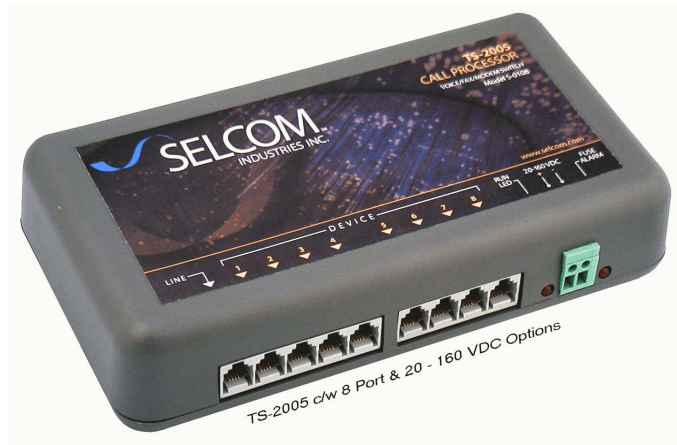

#### **SENSITIVITY**

- Fax Tone Sensitivity - 38 dBm at 1100 Hz
- Tone dialing Sensitivity - 40dBm

#### **OPTIONAL**

- 8 Device ports
- 10 - 30 VDC input - for 12 & 24 VDC power inputs
- 20 - 160 VDC input - for 24, 48 & 129 VDC power inputs
- Remote Control / Reset - 8 form A or B (normally open or closed) relay contact outputs
- Extended temperature range for extreme environments
- Priority Device Line seize

#### **CERTIFICATION**

- FCC & DOC

#### **ELECTRICAL INPUT**

- Power 105 - 130VAC, 4 watts idle, 10 watts max. ringing

#### **ENVIRONMENT**

- 5 to 50 °C, 0 - 95% non condensing rel. humidity - standard
- 30 to +60 °C complete with conformal coating for extreme environments - optional

#### **PHYSICAL**

- Dimensions - 20 x 11 x 4.5 cm. (8 x 4.3 x 1.8 in.)
- Shipping weight - 1Kg (2 lbs) nominal

#### **AUTHORIZED DEALER**